

MAILTECH

High Performance Inkjet Bases and Packaging Equipment

Stealth 206

6’ Premium Inkjet Base

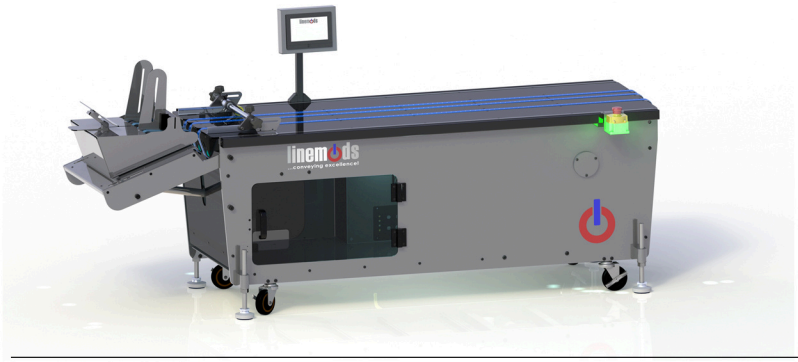


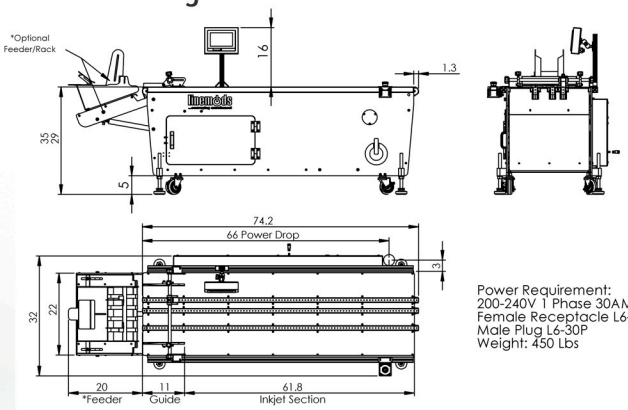


Power Requirement:
200-240V 1 Phase 30AMP
Female Receptacle L6-30C
Male Plug L6-30P
Weight: 450 Lbs

Stealth 207

7’ Premium Inkjet / Dryer Base
Split Base with High-Temp Dryer Extension

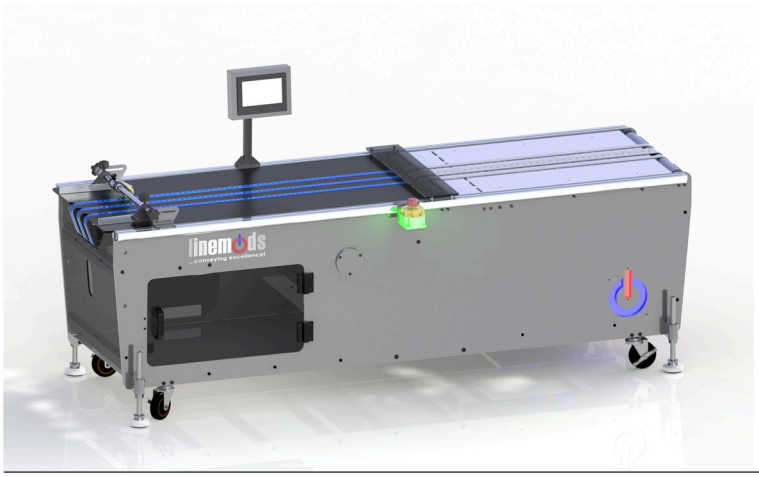

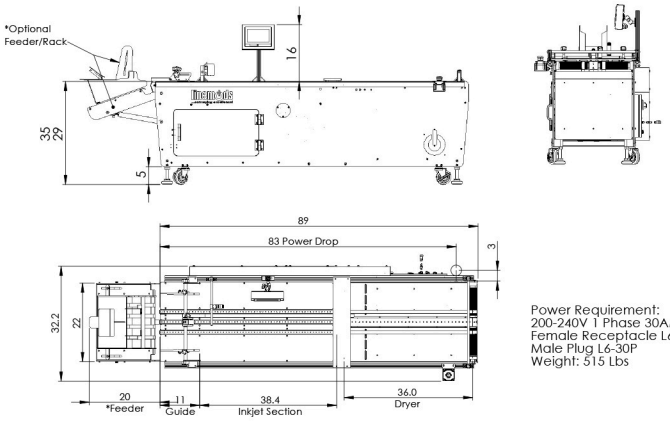


Power Requirement:
200-240V 1 Phase 30AMP
Female Receptacle L6-30C
Male Plug L6-30P
Weight: 515 Lbs

Stealth 209


9’ Premium Inkjet / Dryer Base
Split Base with High-Temp Dryer Extension



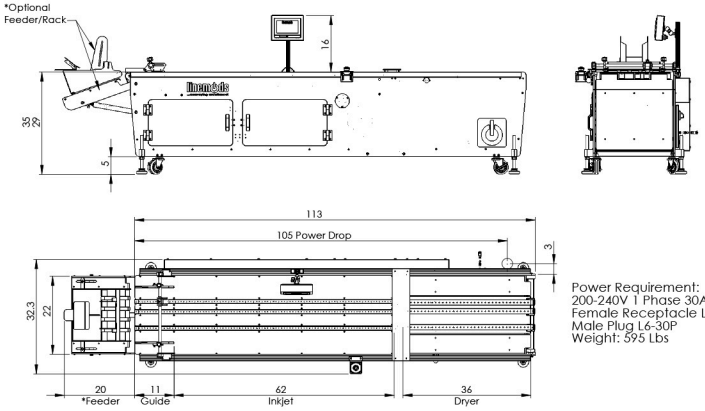

Power Requirement:
200-240V 1 Phase 30AMP
Female Receptacle L6-30C
Male Plug L6-30P
Weight: 595 Lbs

Accessories

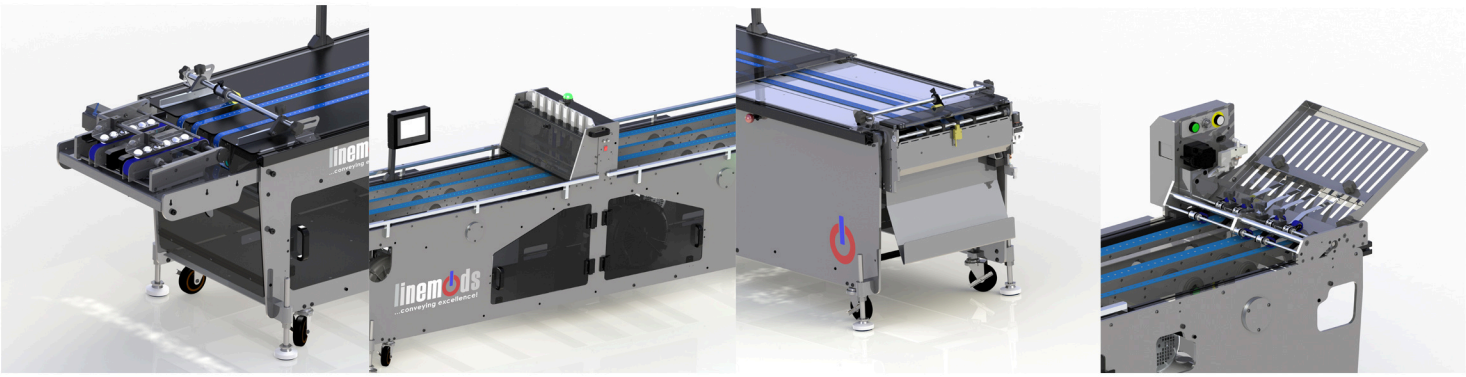

Alignment Table | Rota-Flip | Down Divert | Up Divert 20

Quality Without Compromise

Linemods Premium Inkjet - Quality without compromise, from the innovative vacuum system to the powder coated aluminum frames. Perform quick, easy setups – Linemods "Stealth" systems incorporate our patented "I Series" transport design.

System Design & Details:

All Linemods "Stealth" units are performance engineered to deliver an optimum supply of vacuum without stalling conveyor or stressing pump – We use regenerative turbine vacuum system with pressure sensors to precisely control the vacuum pressure – Linemods offers the most innovative, high performance vacuum conveyor systems available.

Feature attributes:

- **Touch-screen HMI**
- **2 year warranty**
- Simple electrical/drive components
- Minimal tools needed to perform most set-ups/changeovers
- Vacuum belt construction is of a friction resistant backer, perforated for vacuum integration – Timing belts provide skew free operation on the inkjet section
- Component design – All pivot points have bearings, all components designed to last

Attributes

- .5mm belt height (from deck)
- Advanced vacuum modulation system
- 3/8" Powder coated aluminum frames
- Adj. height +5" (12.7cm) from casters
- Tool-less adjustments
- Integrated encoder mount
- Upstream/downstream, speed-following

Product Capacity

Width:
2" - 21" (53cm)

Speed:
600 (183m) or optional 1000 (305m) LFPM

Product thickness range: .05mm - 13mm
Product width range: 2" - 21"
Electrical: 200-240v 1 Ph / 30amps

We can create equipment to fit your needs with optional colors, deck heights, segment configurations, and special guarding.

MAILTECH

linemods ...conveying excellence!

Mailtech, factory-authorized Linemods distributor
625 Acorn St, Deer Park, NY 11729 USA
+1-631-586-2174
www.mailtech.com